



FEEL THE SW  
DIFFERENCE®

# DURABILITY THAT'S ON CALL FOR THE TOUGHEST OF JOBS.




## MegaMan®

**MM-11BK**

POWDER-FREE ECOTEK SUSTAINABLE  
EXAMINATION GLOVES WITH MOISTURE-  
WICKING DRI TEK TECHNOLOGY

### SWEAT MANAGEMENT AND ANSI LEVEL 3 ABRASION RESISTANCE FOR THE ULTIMATE IN COMFORT AND PERFORMANCE


- DriTek® Comfort Technology with absorbent lining wicks away moisture for all day comfort
- EcoTek® Sustainable Technology\*
- ANSI/EN Level 3 abrasion resistance for durability and extended wear
- Fully textured surface for excellent grip
- 1.5 AQL exceeds laboratory standards
- Up to 3x longer lasting than standard nitrile gloves
- SHA Dermatologically Approved

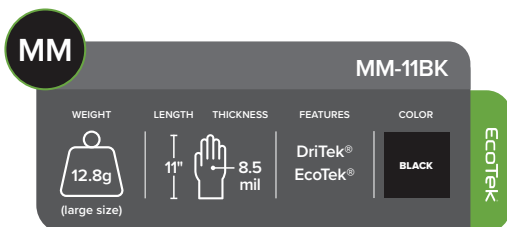

ANSI/EN level 3  
abrasion resistance

Fully textured  
surface for wet  
and dry grip

Tear-resistant  
beaded cuff for  
easy donning

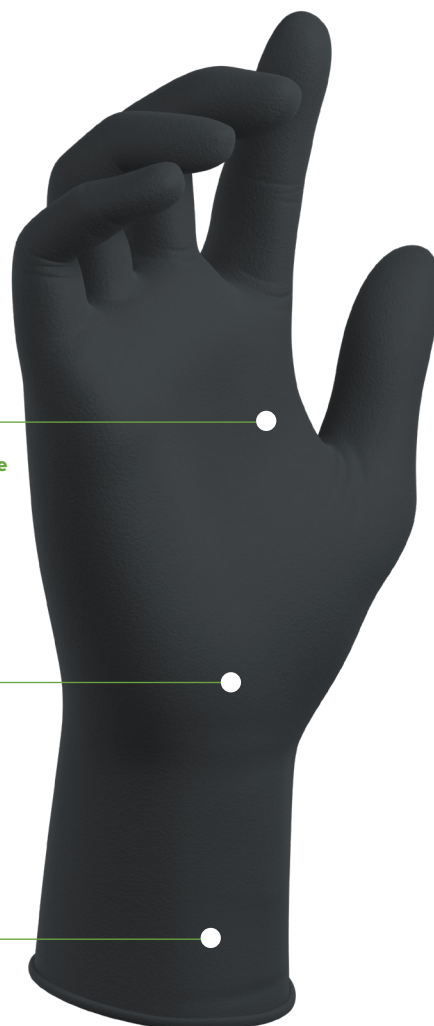

Find it at [fishersci.com](https://fishersci.com) and [fishersci.ca](https://fishersci.ca)

 **fisher scientific**  
part of Thermo Fisher Scientific

## TECHNICAL DATA



### MM-11BK POWDER-FREE ECOTEK SUSTAINABLE EXAMINATION GLOVES WITH MOISTURE- WICKING DRITEK TECHNOLOGY

## PRODUCT DESCRIPTION

### SPECIFICATIONS

PRODUCT	MegaMan®
GRADE	Powder-Free Exam
MATERIAL	Nitrile
THICKNESS FINGER	10.1mil 0.26mm
PALM	8.5mil 0.22mm
CUFF	7.0mil 0.18mm
COLOR	Black
SURFACE OUTER	Fully Textured
INNER	DriTek®
LENGTH	11" 280mm
WEIGHT	12.8g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	China/Malaysia

\* Specifications based on size Large glove

### PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	17 MPa	16 MPa
ELONGATION:	560%	520%

### INTEGRATED TECHNOLOGIES

**DRITEK** Comfort Technology:  
Advanced flock lining is a powder-free, soft cotton nitrile glove lining that wicks away moisture for added comfort in extended use.

**ECOTEK** Sustainable Technology: Product has been tested per ASTM D5526\*

100% Air Inspected



## STANDARDS & CERTIFICATIONS

EN ISO 21420:2020  
EN 455-2000-2015  
ASTM D6319-19  
ASTM D6978-05 (2019)  
ASTM F1671-13  
ASTM F739-12  
Reach EU 1907/2006

EU 2016/425  
ANSI/ISEA 105-2016  
CAT III Complex Design  
FDA 21 CFR 177.2600



CE 0493



Please visit [swssglobal.com/symbols](http://swssglobal.com/symbols) for information on standards used on this document.

## ORDERING

CAT. NO.	MFG. NO.	SIZE	PALM WIDTH	PACKAGING
17441062	N260881	XS 5½ – 6	3.0" 76mm	50 gloves per box 10 boxes per case
17441063	N260882	S 6½ – 7	3.4" 87mm	50 gloves per box 10 boxes per case
17441064	N260883	M 7½ – 8	3.8" 97mm	50 gloves per box 10 boxes per case
17441065	N260884	L 8½ – 9	4.3" 109mm	50 gloves per box 10 boxes per case
17441066	N260885	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
17441067	N260886	2XL 10½ – 11	4.9" 125mm	50 gloves per box 10 boxes per case
17441068	N260887	3XL 11½ – 12	5.3" 134mm	50 gloves per box 10 boxes per case

\* EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to [cs@swssglobal.com](mailto:cs@swssglobal.com).

## APPLICATIONS

Chemical Handling  
First Responder EMS  
Tattooing and Cosmetic Procedures

Keep out of sunlight. Store in a cool, dry place.  
Keep away from sources of ozone or ignition.



R\_N26088X0923

Distributed by Fisher Scientific. Contact us today:

**In the United States**  
Order online: [fishersci.com](http://fishersci.com)  
Call customer service: 1-800-766-7000

**In Canada**  
Order online: [fishersci.ca](http://fishersci.ca)  
Call customer service: 1-800-234-7437



© 2024 Thermo Fisher Scientific Inc. All rights reserved. BN247866309-NA  
Trademarks used are owned as indicated at [fishersci.com/trademarks](http://fishersci.com/trademarks).