



DESIGNED TO ENHANCE WORKER PERFORMANCE.



PF-12TL

POWDER-FREE NITRILE EXTENDED-CUFF EXAMINATION GLOVES WITH SUSTAINABLE ECOTEK TECHNOLOGY


ENGINEERED FOR LIFE SCIENCE, THESE DURABLE GLOVES PROTECT FROM CHEMICALS WITHOUT SACRIFICING GRIP OR DEXTERITY

- EcoTek® Sustainable Technology*
- · Tested for use with chemotherapy drugs
- Extended-cuff for additional protection
- · Silicone-free to prevent contamination
- Exceeds 1.5 AQL laboratory standards







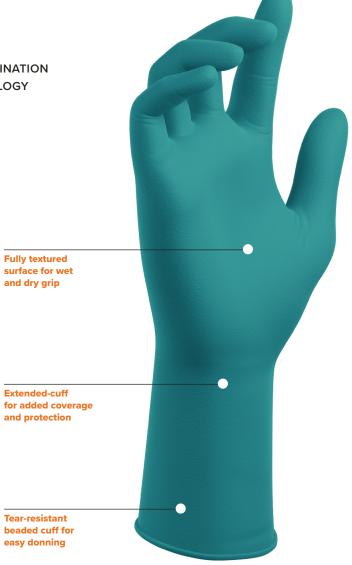







PF-12TL

POWDER-FREE NITRILE EXTENDED-CUFF EXAMINATION GLOVES WITH SUSTAINABLE ECOTEK TECHNOLOGY

PRODUCT DESCRIPTION

| SPECIFICATIONS | | | |
|------------------|------------------|--|--|
| PRODUCT | PowerForm® | | |
| GRADE | Powder-Free Exam | | |
| MATERIAL | Nitrile | | |
| THICKNESS FINGER | 7.1mil 0.18mm | | |
| PALM | 6.2mil 0.16mm | | |
| CUFF | 4.3mil 0.11mm | | |
| COLOR | Teal | | |
| SURFACE | Fully Textured | | |
| LENGTH | 12.0" 305mm | | |
| WEIGHT | 10.7g | | |
| FIT TYPE | Ambidextrous | | |
| CUFF TYPE | Beaded | | |
| WATERTIGHT AQL | 1.5 | | |
| ORIGIN COUNTRY | China/Malaysia | | |
| | | | |

| PHYSICAL PROPERTIES | | | | | | |
|---------------------|-----------|------------|--|--|--|--|
| | PRE-AGING | POST-AGING | | | | |
| TENSILE | | | | | | |
| STRENGTH: | 21 MPa | 20 MPa | | | | |
| ELONGATION: | 575% | 4560% | | | | |

INTEGRATED TECHNOLOGIES

ECOTEK Sustainable Technology: Product has been tested per ASTM D5526*

100% Air Inspected

Clean Washed





STANDARDS & CERTIFICATIONS

EN ISO 21420:2020 EN 455-2000-2015 ASTM D6319-19 ASTM D6978-05 (2019) ASTM F1671-13 ASTM F739-12 Reach EU 1907/2006

EU 2016/425 CAT III Complex Design UL NFPA 1999-2018 FDA 21 CFR 177.2600













Please visit swssglobal.com/symbols for information on standards used on this document.

ORDERING

| CAT NO. | MFG NO. | SIZE | PALM WIDTH | PACKAGING |
|----------|---------|--------------|------------|-------------------------------------|
| 17441056 | N127361 | XS 5½ – 6 | 3.0" 76mm | 50 gloves per box 10 boxes per case |
| 17441007 | N127362 | S 6½ – 7 | 3.4" 85mm | 50 gloves per box 10 boxes per case |
| 17441006 | N127363 | M 7½ – 8 | 3.8" 96mm | 50 gloves per box 10 boxes per case |
| 17441005 | N127364 | L 8½ – 9 | 4.5" 114mm | 50 gloves per box 10 boxes per case |
| 17441008 | N127365 | XL 9½ – 10 | 4.9" 125mm | 50 gloves per box 10 boxes per case |
| 17441061 | N127366 | 2XL 10½ – 11 | 5.2" 133mm | 50 gloves per box 10 boxes per case |

* EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssglobal.com.

APPLICATIONS

Chemical Handling

Clinical

First Responder EMS

Food Processing

Handling and Packaging Class 1

Medical Devices

Laboratory

Light Chemical Mixing

Pharma Production

Keep out of sunlight. Store in a cool, dry place. Keep away from sources of ozone or ignition.







Distributed by Fisher Scientific. Contact us today:

In the United States

In Canada

Order online: fishersci.com

Order online: fishersci.ca

Call customer service: 1-800-766-7000

Call customer service: 1-800-234-7437

part of Thermo Fisher Scientific

© 2024 Thermo Fisher Scientific Inc. All rights reserved. BN247866657-NA Trademarks used are owned as indicated at fishersci.com/trademarks.

^{*} Specifications based on size Large glove