



FEEL THE SW  
DIFFERENCE®

# DESIGNED TO ENHANCE WORKER PERFORMANCE.







**PF-95GY**

SWEAT ABSORBING EXAMINATION ECOTEK  
SUSTAINABLE NITRILE SINGLE-USE GLOVES\*

**WORK WITH CONFIDENCE AND COMFORT  
IN SUSTAINABLE GLOVES WITH EXCLUSIVE  
DRITEK SWEAT MANAGEMENT TECHNOLOGY\***

- DriTek® Comfort Technology with absorbent lining that wicks away moisture for all day comfort
- EcoTek® Sustainable Technology\*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards

PF			PF-95GY		
WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR	
 8.8g (large size)	 9.5"	 6.2 mil	DriTek® EcoTek®	 GRAY	


EcoTek



ANSI Level 1  
Puncture  
resistance

Fully textured  
surface for wet  
and dry grip

Tear-resistant  
beaded cuff for  
easy donning

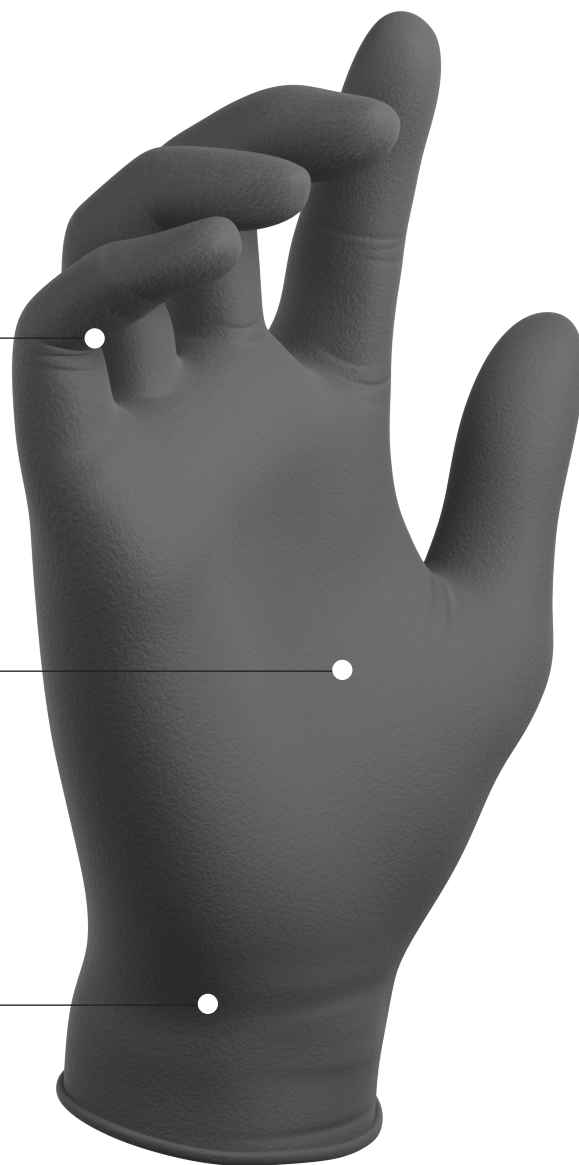

Find it at [fishersci.com](https://fishersci.com) and [fishersci.ca](https://fishersci.ca)

 **fisher scientific**  
part of Thermo Fisher Scientific

## TECHNICAL DATA



**PowerForm®**

**PF-95GY**

**SWEAT ABSORBING EXAMINATION ECOTEK  
SUSTAINABLE NITRILE SINGLE-USE GLOVES\***

### PRODUCT DESCRIPTION

#### SPECIFICATIONS

PRODUCT		PowerForm®	
GRADE		Powder-Free Exam	
MATERIAL		Nitrile	
THICKNESS	FINGER	8.2mil	0.21mm
	PALM	6.2mil	0.16mm
	CUFF	5.9mil	0.15mm
COLOR		Gray	
SURFACE	OUTER	Fully Textured	
	INNER	DriTek®	
LENGTH		9.5"	242mm
WEIGHT		8.8g	
FIT TYPE		Ambidextrous	
CUFF TYPE		Beaded	
WATERTIGHT AQL		1.5	
ORIGIN COUNTRY		China/Malaysia	

\* Specifications based on size Large glove

#### PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
<b>TENSILE STRENGTH:</b>	15 MPa	15 MPa
<b>ELONGATION:</b>	550%	500%

#### INTEGRATED TECHNOLOGIES

**DRITEK** Comfort Technology:  
Advanced flock lining is a soft cotton nitrile glove lining that wicks away moisture for added comfort in extended use.


**ECOTEK** Sustainable Technology: Product has been tested per ASTM D5526\*

100% Air Inspected



### STANDARDS & CERTIFICATIONS

EN ISO 21420:2020	EU 2016/425
EN 455-2000-2015	ANSI/ISEA 105-2016
ASTM D6319-19	CAT III Complex Design
ASTM D6978-05 (2019)	FDA 21 CFR 177.2600
ASTM F1671-13	
ASTM F739-12	
Reach EU 1907/2006	

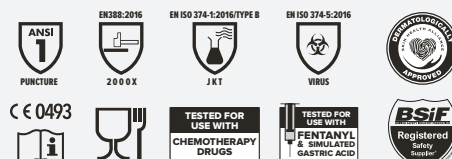

Please visit [swssglobal.com/symbols](https://www.swssglobal.com/symbols) for information on standards used on this document.

### ORDERING

CAT. NO.	MFG NO.	SIZE	PALM WIDTH	PACKAGING	
17441085	N260501	XS 6½ – 7	3.0" 75mm	50 gloves per box	10 boxes per case
17441086	N260502	S 6½ – 7	3.3" 85mm	50 gloves per box	10 boxes per case
17441087	N260503	M 7½ – 8	3.7" 95mm	50 gloves per box	10 boxes per case
17441027	N260504	L 8½ – 9	4.2" 107mm	50 gloves per box	10 boxes per case
17441089	N260505	XL 9½ – 10	4.5" 114mm	50 gloves per box	10 boxes per case
17441090	N260506	2XL 10½ – 11	4.9" 124mm	50 gloves per box	10 boxes per case

\* EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to [cs@swssglobal.com](mailto:cs@swssglobal.com).

### APPLICATIONS

For Medical Use

Keep out of sunlight. Store in a cool, dry place.  
Keep away from sources of ozone or ignition.



R\_N26050X0923

Distributed by Fisher Scientific. Contact us today:

**In the United States**  
Order online: [fishersci.com](https://fishersci.com)  
Call customer service: 1-800-766-7000

**In Canada**  
Order online: [fishersci.ca](https://fishersci.ca)  
Call customer service: 1-800-234-7437



© 2024 Thermo Fisher Scientific Inc. All rights reserved. BN247866665-NA  
Trademarks used are owned as indicated at [fishersci.com/trademarks](https://fishersci.com/trademarks).