



DESIGNED TO ENHANCE WORKER PERFORMANCE.




PF-95OR

POWDER FREE ECOTEK SUSTAINABLE NITRILE EXAM GLOVES WITH TRACTEK

ENGINEERED WITH HIGH DURABILITY,
THESE SUSTAINABLE GLOVES
PROVIDE EXCEPTIONAL GRIP IN WET AND
OILY CONDITIONS*

- TracTek® high density pattern for grip in wet / oily conditions
- EcoTek® Sustainable Technology
- · Hi-Vis orange color
- · Beaded cuff allows easy donning and doffing



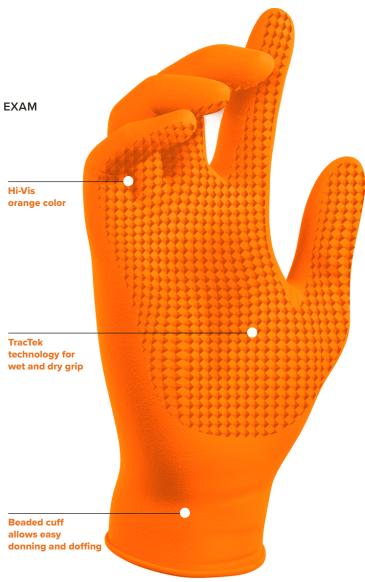





PF-95OR

POWDER FREE ECOTEK SUSTAINABLE NITRILE EXAM **GLOVES WITH TRACTEK**

PRODUCT DESCRIPTION

SPECIFICATIONS					
PRODUCT		PowerFor	m®		
GRADE		Powder-Free Exam			
MATERIAL		Nitrile			
THICKNESS FI	NGER	5.9mil	0.15mm		
P/	LM	5.1mil	0.13mm		
Cl	JFF	4.3mil	0.11mm		
COLOR		Orange			
SURFACE		Fully Textured			
LENGTH		9.5"	242mm		
WEIGHT		7.5g			
FIT TYPE		Ambidextrous			
CUFF TYPE		Beaded			
WATERTIGHT AQL		1.5			
ORIGIN COUNTRY		Thailand			

PHYSICAL PROPERTIES							
	PRE-AGING	POST-AGING					
TENSILE							
STRENGTH:	14 MPa	14 MPa					
ELONGATION:	500%	400%					

INTEGRATED TECHNOLOGIES

ECOTEK Sustainable Technology: Product has been tested per ASTM D5526*

TRACTEK Grip Technology: Provides a highdensity pattern maximizes grip in wet or oily conditions.





STANDARDS & CERTIFICATIONS

EN 420:2003 EN 455:2000-2015 EU 2016/425 Reach EU 1907/2006 ANSI/ISEA 105-2016 US/EU Food Contact





C € 0493











Please visit swssglobal.com/symbols for information on standards used on this document.

ORDERING

CAT NO.	MFG NO.	D. SIZE PALM W		PACKAGING	
17441209	N991752	S 6½ – 7	3.3" 85mm	100 gloves per box	10 boxes per case
17441210	N991753	M 7½ – 8	3.7" 95mm	100 gloves per box	10 boxes per case
17441211	N991754	L 8½ – 9	4.3" 108mm	100 gloves per box	10 boxes per case
17441212	N991755	XL 9½ – 10			·
				100 gloves per box	10 boxes per case
17441213	N991756	2XL 10½ – 11	5.0" 127mm	100 gloves per box	10 boxes per case

* EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssolobal.com.

APPLICATIONS

Chemical Handling Liquid Handling

> Keep out of sunlight. Store in a cool, dry place. Keep away from sources of ozone or ignition.







R_N99175X0924

Distributed by Fisher Scientific. Contact us today:

In the United States Order online: fishersci.com

In Canada

Order online: fishersci.ca

Call customer service: 1-800-766-7000

Call customer service: 1-800-234-7437



^{*} Specifications based on size Large glove