



DESIGNED TO ENHANCE WORKER PERFORMANCE.




PF-95TL

POWDER-FREE ECOTEK SUSTAINABLE NITRILE EXAMINATION GLOVES*

VERSATILE SUSTAINABLE 5 MIL SINGLE-USE GLOVE COMBINES MAXIMUM COMFORT AND CONTROL WITH HIGH-QUALITY CONSTRUCTION

- EcoTek® Sustainable Technology*
- · Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards



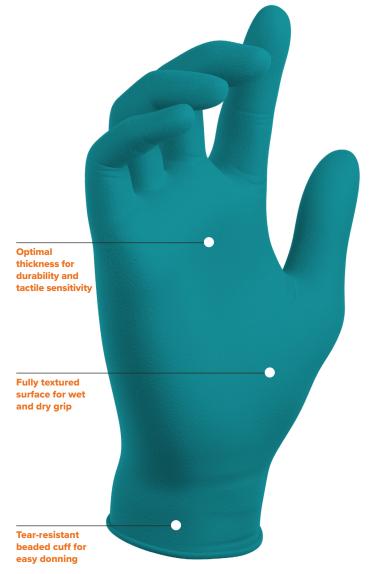





PF-95TL

POWDER-FREE ECOTEK SUSTAINABLE **NITRILE EXAMINATION GLOVES***

PRODUCT DESCRIPTION

SPECIFICATIONS						
PRODUCT		PowerForm®				
GRADE		Powder-Free Exam				
MATERIAL		Nitrile				
THICKNESS	FINGER	5.8mil	0.15mm			
	PALM	5.0mil	0.13mm			
	CUFF	3.9mil	0.10mm			
COLOR		Teal				
SURFACE		Fully Textured				
LENGTH		9.5"	242mm			
WEIGHT		6.5g				
FIT TYPE		Ambidextrous				
CUFF TYPE		Beaded				
WATERTIGHT AQL		1.5				
ORIGIN COUNTRY		China				

PHYSICAL PROPERTIES							
	PRE-AGING	POST-AGING					
TENSILE							
STRENGTH:	21 MPA	20 MPA					
ELONGATION:	560%	540%					

INTEGRATED TECHNOLOGIES

ECOTEK Sustainable Technology: Product has been tested per ASTM D5526*

100% Air Inspected

Clean Washed





STANDARDS & CERTIFICATIONS

EN ISO 21420:2020 EN 455-2000-2015 ASTM D6319-19 ASTM D6978-05 (2019) ASTM F1671-13 ΔSTM F739-12

FU 2016/425 CAT III Complex Design















Please visit swssglobal.com/symbols for information on standards used on this document

ORDERING

CAT NO.	MFG NO.	SIZE	PALM WIDTH	PACKAGING	
17000749	N200361	XS 5½ – 6	3.0" 75mm	100 gloves per box	10 boxes per case
17441000	N200362	S 6½ – 7	3.5" 89mm	100 gloves per box	10 boxes per case
17441001	N200363	M 7½ – 8	3.8" 98mm	100 gloves per box	10 boxes per case
17441002	N200364	L 8½ – 9	4.3" 108mm	100 gloves per box	10 boxes per case
17441003	N200365	XL 9½ – 10	4.6" 116mm	100 gloves per box	10 boxes per case
17441004	N200366	2XL 10½ – 11	4.9" 124mm	100 gloves per box	10 boxes per case

* EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssglobal.com.

APPLICATIONS

Chemical Handling

Keep out of sunlight. Store in a cool, dry place Keep away from sources of ozone or ignition.







Distributed by Fisher Scientific. Contact us today:

In the United States

In Canada

Order online: fishersci.com

Order online: fishersci.ca

Call customer service: 1-800-766-7000

Call customer service: 1-800-234-7437

part of Thermo Fisher Scientific

^{*} Specifications based on size Large glove